



Dubl-Stik® 2568

With a long-standing history of providing comfort and support, Tred-MOR® Dubl-Stik® 2568 commercial carpet cushion is engineered to keep high-traffic areas feeling great, longer. The added tensile strength provides a durable solution that helps reduce the loss of pile height in carpets so they look good for years to come. Recommended for heavy commercial and public spaces, including institutional areas subject to PERIODIC rolling-wheel traffic.



Anti-fatigue comfort



Acoustical barrier
Passive vibration isolation




Double glue or
Conventional stretch-in



VaporFLO™ moisture barrier
with antimicrobial

Available with




APPLICATIONS

- Hospitality
- Casino
- Campus living
- Corporate
- Senior living
- Multi-family
- Indoor public space
- Convention centers/ballrooms

PRODUCT SPECIFICATION DATA

Product code:	BV0338
Product name:	Dubl-Stik™ 2568
Color:	Black
Material content:	100% synthetic rubber
Backing top:	Poly-tek
Backing bottom:	Spunbonded
Material weight:	68 oz./sq. yd.
Density:	22 lbs./cu. ft.
Thickness:	6.35 mm (.250"/1/4")
Roll weight:	138 lbs.
Traffic classification:	Class III extra heavy
Roll dimensions:	4' 6" x 60' (30 sq. yds.) 270 sq. ft./roll

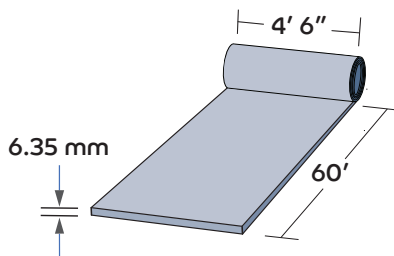

COMFORT & DURABILITY (ASTM D3676, D2646)

Compression set @ 50%:	17.5%
Compression load deflection @ 25%:	3.1 psi
Compression load deflection @ 65%:	20.0 psi
Breaking strength – length:	45.0 psi
Breaking strength – width:	41.0 psi

ACOUSTICAL PERFORMANCE (ASTM E90, E492, E2179)

	6" concrete bare slab
Impact insulation class (IIC):	79
Delta IIC (ΔIIC):	43
Sound transmission class (STC):	53

GREEN CREDENTIALS (CRI Standards)

Recyclable:	100% recyclable
Indoor air quality:	CRI Green Label certified
VOC emissions:	Pass Calif. section 01350

FLAME CERTIFICATION (DOC-FF 1-70, ASTM E662-06, E648)

Pill test:	Pass
Smoke density:	Pass
Radiant panel:	Composite test required w/ broadloom carpet or carpet tile and adhesive

MOISTURE RESISTANCE (ASTM E96)

Resistance to topical liquid:	100%
Vapor permeance from slab:	Class III
Antimicrobial:	Vapor semi-permeable Guardian™

