Tred-MOR®
LEGACY Series

Noise, Comfort, and Resiliency Control





Dubl-Stik® 2580 QL

Dubl-Stik® 2580 QL carpet cushion has been the premium choice for hospitality and commercial public areas since 1985. With a tensile strength that's perfect for heavy foot and wheeled traffic, these cushions provide the ultimate support while reducing pile-height loss. Future removal is also made significantly easier with the Quik-LIFT® backing system, allowing the carpet and cushion to release from the substrate without scraping. Recommended for extra-heavy commercial and public spaces, including institutional areas subject to FREQUENT rolling-wheel traffic.

- Anti-fatigue comfort
- Acoustical barrier
Passive vibration isolation
- Easy removal
Quik-LIFT® technology
- Double glue or
Conventional stretch-in
- VaporFLO™ moisture barrier
with antimicrobial

APPLICATIONS

- Hospitality
- Casino
- Campus living
- Corporate
- Senior living
- Multi-family
- Indoor public space
- Convention centers/ballrooms

PRODUCT SPECIFICATION DATA

Product code:	BV0182
Product name:	Dubl-Stik® 2580 QL
Color:	Black
Material content:	100% synthetic rubber
Backing top:	Polytek
Backing bottom:	Quik-LIFT® poly felt
Material weight:	80 oz./sq. yd.
Density:	26 lbs./cu. ft.
Thickness:	6.35 mm (.250"/1/4")
Roll weight:	155 lbs.
Traffic classification:	Class III extra heavy
Roll dimensions:	4' 6" x 60' (30 sq. yds.) 270 sq. ft./roll

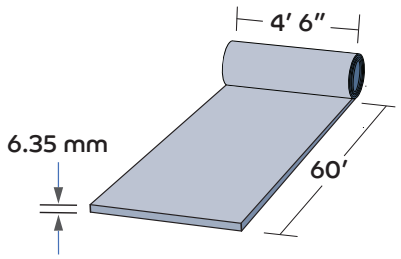

COMFORT & DURABILITY (ASTM D3676, D2646)

Compression set @ 50%:	15.0%
Compression load deflection @ 25%:	5.0 psi
Compression load deflection @ 65%:	25.0 psi
Breaking strength – length:	45.0 psi
Breaking strength – width:	41.0 psi

ACOUSTICAL PERFORMANCE (ASTM E90, E492, E2179)

	6" concrete bare slab
Impact insulation class (IIC):	78
Delta IIC (ΔIIC):	42
Sound transmission class (STC):	53

GREEN CREDENTIALS (CRI Standards)

Recyclable:	100% recyclable
Indoor air quality:	CRI Green Label certified
VOC emissions:	Pass Calif. section 01350

FLAME CERTIFICATION (DOC-FF 1-70, ASTM E662-06, E648)

Pill test:	Pass
Smoke density:	Pass
Radiant panel:	Composite test required w/ broadloom carpet or carpet tile and adhesive

MOISTURE RESISTANCE (ASTM E96)

Resistance to topical liquid:	100%
Vapor permeance from slab:	Class III
Antimicrobial:	Vapor semi-permeable Guardian™

902 Armstrong Street | Morris, IL 60450 | 800.435.4062 | 815.942.2300 | TredMOR.com

© 2025 Leggett & Platt Incorporated • MTLT1151_32017_04-25