

PRODUCT SPECIFICATIONS

Product Description	Tred-MOR® 2500*	Tred-MOR® 2580	Tred-MOR® 2568	Tred-MOR® 1562*
Material Content	Made with 100% Synthetic Rubber	Made with 100% Synthetic Rubber	Made with 100% Synthetic Rubber	Made with 100% Synthetic Rubber
Weight per Sq. Yd.	100 ounces	80 ounces	68 ounces	62 ounces
Thickness	0.250 inches	0.250 inches	0.250 inches	0.156 inches
Density	33 lbs./cu. ft.	26 lbs./cu. ft.	22 lbs./cu. ft.	33 lbs./cu. ft.
Facing – Top/Bottom	Non-woven Polytek	Non-woven Polytek	Non-woven Polytek	Non-woven Polytek
(Optional) Underside	Quik-LIFT® Non-Woven	Quik-LIFT® Non-Woven	Quik-LIFT® Non-Woven	Quik-LIFT® Non-Woven
Width	4 feet 6 inches	4 feet 6 inches	4 feet 6 inches	4 feet 6 inches
Roll Length	30 feet	60 feet	60 feet	60 feet
Antimicrobial	GUARDIAN™	GUARDIAN™	GUARDIAN™	GUARDIAN™
Moisture Resistant	Yes	Yes	Yes	Yes
Warranty	Life of the Carpet	Life of the Carpet	Life of the Carpet	Life of the Carpet
Recommended for Use Over Radiant Heat	Yes	Yes	Yes	Yes
Recommended Use	Extra-heavy commercial. Includes institutional areas subject to CONTINUOUS rolling-wheel traffic.**	Extra-heavy commercial. Includes institutional areas subject to FREQUENT rolling-wheel traffic.**	Heavy commercial. Includes institutional areas subject to PERIODIC rolling-wheel traffic.**	Extra-heavy commercial. Includes institutional areas subject to CONTINUOUS rolling-wheel traffic.**

PERFORMANCE DATA

	Tred-MOR® 2500	Tred-MOR® 2580	Tred-MOR® 2568	Tred-MOR® 1562
Compression	@25% 7 PSI	@25% 5 PSI	@25% 3 PSI	@25% 7 PSI
Deflection Method – 601 / 12151	@65% 50 PSI	@65% 25 PSI	@65% 20 PSI	@65% 45 PSI

FLAMMABILITY

	Tred-MOR®2500	Tred-MOR® 2580	Tred-MOR® 2568	Tred-MOR® 1562
ASTM E 662 (Smoke Chamber)	Pass	Pass	Pass	Pass
FF 1-70 (Pill Test)	Pass	Pass	Pass	Pass
ASTM E 648 (Radiant Panel)	Not applicable to separate carpet cushion. Carpet and cushion must be tested as an assembly.			

EMISSIONS

	Tred-MOR® 2500	Tred-MOR® 2580	Tred-MOR® 2568	Tred-MOR® 1562
CRI Green Label Plus	Tested and certified by the Carpet and Rug Institute as less than or not exceeding their minimum standard established for total chemical emissions (TVOC) and specific chemicals.			

*Also available in a version that meets U.S. Coast Guard requirements.

**For maximum carpet protection, rolling-wheel areas should be double-glued to prevent carpet stretching and carpet delamination caused by shear forces and friction. Notes: Scrim backing or other raw materials may be changed without prior notice when shortages occur or when technology advancements become available to improve product performance. Typical product properties are derived from averages resulting from usual manufacturing tolerances. Such variances will not affect product quality or performance.



Premium Rubber, High-Density Carpet Cushion

Tred-MOR®

Tred-MOR®

CARPET CUSHION

The industry-standard Premium Contract Carpet Cushion for **DUBL-STIK®** and **Conventional Installations**

For **hospitality,**
commercial,
casinos,
restaurants,
retail, and similar
high-traffic
settings.

SCI®
Sponge Cushion, Inc.
A Leggett & Platt COMPANY
INCORPORATED

Tred-MOR®

The best choice for high-traffic areas is still Tred-MOR®, the industry standard since 1985. Tred-MOR, made of synthetic rubber for added tensile strength and resiliency, is the perfect cushion selection to accompany broadloom carpets.

The industry standard since 1985: over 100 million square yards sold!

MADE FROM 100% SYNTHETIC RUBBER FOR SUPERIOR COMFORT AND WEAR

- ADDS SUPERIOR CUSHIONING over subfloors for optimum underfoot comfort
- EXTENDS carpet life by up to 50%
- SUPERIOR noise suppression
- StainSTOP™ construction restricts spills from seeping to the subfloor

ECO-FRIENDLY

- CONTRIBUTES TO LEED® flooring system and building material points
- Can be 100% recycled at the end of its useful life
- Contains not less than 20% pre-consumer recycled material

HEALTH AND SAFETY

- Features GUARDIAN™ antimicrobial to inhibit the growth of odor-causing mold, mildew, and bacteria
- Meets or exceeds indoor air quality standards as established by the CRI (Carpet and Rug Institute) GREEN LABEL PLUS program
- HYPOALLERGENIC

For hospitality carpet, the perfect choice is Tred-MOR Carpet Cushion. To learn more, contact your Leggett & Platt/SCI representative or visit Sponge-Cushion.com or LPHospitality.com.

Tred-MOR® 2500 | 0.250" | 33 lb. Density

Tred-MOR® 2580 | 0.250" | 26 lb. Density

Tred-MOR® 2568 | 0.250" | 22 lb. Density

Tred-MOR® 1562 | 0.156" | 33 lb. Density

Quik-LIFT® releasable backing system for Tred-MOR® installations

Sample is attached to card upside down to show Quik-LIFT's felt fabric backing.

An industry first


Quik-LIFT® is the industry's first releasable backing system. The Quik-LIFT felt fabric is thermal-bonded to the cushion during the manufacturing process, and is available as an upgrade option.

When Tred-MOR with Quik-LIFT is replaced, the felt fabric will release from the floor, minimizing pull-up labor and prep time. Quik-LIFT leaves a smooth, clean surface, ready for the next Dubl-STIK installation.

Quik-LIFT is ideally suited to Dubl-STIK installations where fast removal and fast re-installation of carpet and cushion is necessary. Tred-MOR with Quik-LIFT is ideal for casinos, restaurants, hospitality, retail, and similar high-traffic settings.

Quik-LIFT Backing System

The Quik-LIFT felt backing holds the cushion tight to the floor, then releases when pulled up. Take-up is faster, disposal and handling are much easier, and floor prep time is cut to a minimum.

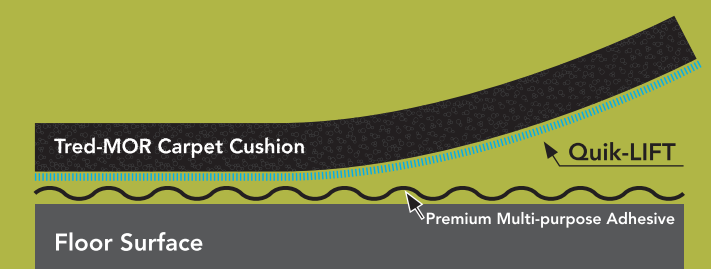

For downloadable product sheets and installation instructions, visit Sponge-Cushion.com or LPHospitality.com.